

## GV-BL130D 1.3MP H.264 IR Bullet IP Camera



- 1.3 megapixel progressive scan CMOS
  - Dual streams from H.264 and MJPEG
  - Up to 30 fps at 1280 x 1024
  - Intelligent IR
  - Ingress protection (IP66)
  - Cable-concealed bracket preventing cable from being cut
  - One alarm input and sensor output
  - Memory Card Slot
  - 2-way audio
  - Wide Dynamic Range (WDR)
  - Motion detection
  - Tampering alarm
  - Privacy mask
  - IP address filtering
  - DC 12V / AC 24V / PoE
  - Removable IR-cut filter for Day/Night function
  - Supports iPhone, iPad, Android & 3GPP
  - 31 languages on Web interface
  - ONVIF conformant
- \* No Memory Card Slot & local storage function for Argentina.*

The Bullet Camera features a weather sealed and IP66 rating housing for outdoor use. The camera also features 16 IR LEDs for infrared illumination in night vision applications. Additionally, the Bullet Camera supports both DC 12V and AC 24V power supply.

### Active Tampering Alarm



Tampered



Focus Change



Camera Shift

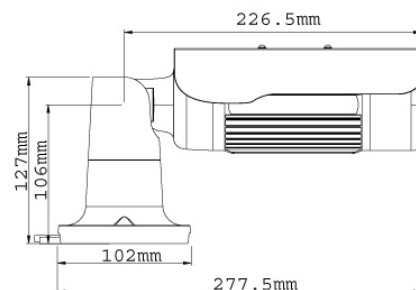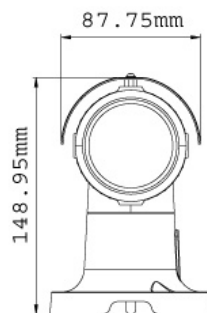

Camera		
Image Sensor	1/2.5" progressive scan CMOS "	
Picture Elements	1280 (H) x 1024 (V)	
Minimum Illumination	Color	1 Lux (1/30 sec), 0.5 Lux (1/5 sec)
	B/W	0 Lux at F/1.2
	IR ON	
Shutter Speed	Automatic, Manual (1/5 ~ 1/8000 sec)	
White Balance	Automatic, Manual (2800K ~ 8500K)	

Gain Control	Automatic	
S/N Ratio	45 dB	
BLC	Yes	
<b>Lens</b>		
Megapixel	Yes	
Day/Night	Yes (with removable IR-cut filter)	
Lens Type	Varifocal	
Focal Length	3 ~ 9 mm	
Maximum Aperture	F / 1.2	
Mount	Ø 14 mm	
Image Format	1/2.7"	
Operation	Focus	Manual (w/lock)
	Zoom	Manual (w/lock)
	Iris	DC Drive
Max. Torque (Focus/ Zoom Screws)	0.049 N.m	
IR LED Quantity	16 IR LEDs	
IR Distance	15 m / 50 ft (Max.)	
<b>Operation</b>		
Video Compression	H.264, MJPEG	
Video Stream	Dual streams from H.264 and MJPEG	
Frame Rate	30 fps at 1280 x 1024 (SXGA) * The frame rate and the performance may vary depending on the number of connections and data bitrates (different scenes).	
Image Setting	Brightness, Contrast, Sharpness, Gamma, White Balance, Flicker-less, Image Orientation, Backlight Compensation, Shutter Speed, D/N Sensitivity, WDR, Defog	
Audio Compression	G.711, AAC (16 kHz / 16 bit) * AAC is only supported by GV-System V8.5 or later	
Two-way Audio	Yes	
Sensor Input	1 Input (Dry Contact)	
Alarm Output	1 Digital Output (200mA 5V DC)	
<b>Video Resolution</b>		
Main Stream	4 : 3	1280 x 960, 640 x 480, 320 x 240
	16 : 9	1280 x 720, 640 x 360, 448 x 252
	5 : 4	1280 x 1024, 640 x 512, 320 x 256
Sub Stream	4 : 3	640 x 480, 320 x 240
	16 : 9	640 x 360, 448 x 252
	5 : 4	640 x 512, 320 x 256
<b>Network</b>		
Interface	10/100 Ethernet	
Protocol	HTTP, HTTPS, TCP, UDP, SMTP, FTP, DHCP, NTP, UPnP, DynDNS, 3GPP/ISMA, RTSP, PSIA, SNMP, QoS (DSCP), ONVIF	
<b>Mechanical</b>		
Temperature Detector	Yes	
Camera Angle Adjustment	Pan	0° ~ 360°
	Tilt	90° ~ 180°
	Rotate	0° ~ 360°
Connectors	Power	2-pin terminal block, PoE
	Ethernet	RJ-45
	Audio	1 In (RCA female for microphone) 1 Out (RCA female for speaker)
	Digital I/O	I/O Wires
	Auto Iris	DC Drive
	Local Storage	Micro SD/SDHC/SDXC memory card slot (for Class 6 card or above)
TV-Out	None	
<b>General</b>		
Environment Temperature	-20 °C ~ 50 °C / -4 °F ~ 122 °F	
Humidity	10% to 90% (no condensation)	
Power Source	12V DC / 24V AC / PoE	

Max. Power Consumption	12 W	
Dimensions	Camera Body	277.5 x 87.75 x 148.95 mm / 10.9 x 3.45 x 5.86 in
	Cable Length	1 m / 3.28 ft
	Maximum Cable Diameter	ø 7.1 mm / 0.28 in
	Maximum Connector Diameter	ø 25.2 mm / 0.99 in
Weight	1.35 kg / 2.98 lb	
Ingress Protection	IP66	
Regulatory	CE, FCC, C-Tick, RoHS compliant	
<b>Power over Ethernet</b>		
PoE Standard	IEEE 802.3af Power over Ethernet / PSE	
PoE Power Supply Type	End-Span	
PoE Power Output	Per Port 48V DC, 350mA. Max. 15.4 watts	
<b>Web Interface</b>		
Installation Management	Web-based configuration	
Maintenance	Firmware upgrade through Web Browser or Utility	
Access from Web Browser	Camera live view, video recording, change video quality, bandwidth control, image snapshot, digital I/O control, audio, Picture in Picture, Picture and Picture, Privacy Mask, Visual Automation, Tampering Alarm, Text Overlay	
Language	Arabic / Bulgarian / Czech / Danish / Dutch / English / Finnish / French / German / Greek / Hebrew / Hungarian / Indonesian / Italian / Japanese / Lithuanian / Norwegian / Persian / Polish / Portuguese / Romanian / Russian / Serbian / Simplified Chinese / Slovakian / Slovenian / Spanish / Swedish / Thai / Traditional Chinese / Turkish	
<b>Applications</b>		
Network Storage	GV-NVR, GV-System, GV-Backup Center, GV-Recording Server	
Smart Device Access	GV-Eye for Android smartphone, tablet, iPhone, and iPod Touch GV-Eye HD for iPad.	
Live Viewing	IE, GV-MultiView	
CMS Server support	GV-Control Center, GV-Center V2, GV-VSM	

**Note:** Specifications are subject to change without notice.