

ACM-5601/ACM-5611

Megapixel IP PoE Box Camera / Megapixel IP D/N PoE Box Camera




- 1/3" Aptina Progressive Scan CMOS
- Day and night function with mechanical IR cut filter (ACM-5611)
- Minimum illumination 0.5 lux at F1.0 (ACM-5601) / 0.05 lux at F1.0 (ACM-5611)
- Built-in 4.2 mm / F1.8 Megapixel fixed lens
- 8 fps at 1280 x 1024 resolution
- Selectable MPEG-4 SP, MJPEG compressions
- Two-way audio
- Video motion detection
- Digital input and digital output
- Powered by PoE Class 3 / DC 12V

PHOTO INDICATION



- 1 Ethernet Port
- 2 Reset Button
- 3 Audio Input / Output
- 4 Digital Input / Output
- 5 DC 12V Power Input
- 6 DC 12V Power Output

DIMENSION DIAGRAM

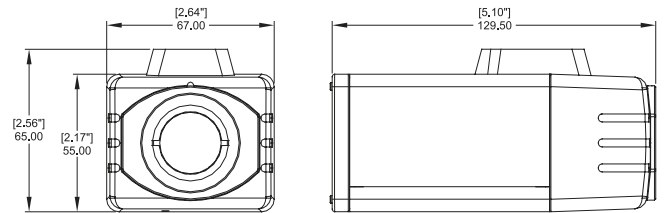

Unit: mm [inch]

ACCESSORY OPTIONS

Lens		
PLEN-0102		IR Compatible, Fixed Iris, F1.8, 8 mm, 33.3° (For ACM-5601 only)
PLEN-0107		Manual Iris, F1.4, 3.5 mm - 8 mm, 70° - 31.6° (For ACM-5601 only)
PLEN-0201		Manual Iris, F1.2, 2.4 mm - 6 mm, 101.3° - 45.6° (For ACM-5601 only)
PLEN-0202		IR Compatible, Manual Iris, F1.6, 2.8 mm - 12 mm, 91.1° - 22.9° (ACM-5601) IR Compatible, Manual Iris, F1.6, 2.8 mm - 12 mm, 78.4° - 22.4° (ACM-5611)

Outdoor Housing & Bracket		
PMAX-0200		IP66, with heater and fan powered by 110V AC, -30 °C ~ 50 °C (-22 °F ~ 122 °F), requires housing bracket
PMAX-0201		IP66, with heater and fan powered by 220V AC, -30 °C ~ 50 °C (-22 °F ~ 122 °F), requires housing bracket
PMAX-0202		IP66, 0 °C ~ 50°C (32 °F ~ 122 °F), requires housing bracket
PMAX-1101		Aluminum, max. load 10 kg (22.05 lb), tilt angle 90° (For PMAX-0200, PMAX-0201, PMAX-0202)

Camera Bracket		
PMAX-1100		Plastic, max. load 3.5 kg (7.72 lb), tilt angle 90°

ACM-5601/ACM-5611**PRODUCT SPECIFICATION**

	ACM-5601	ACM-5611
• Device		
Device Type	Box Camera	
Image Sensor	Aptina Progressive Scan CMOS	
Sensor Size	1/3" (4.8 x 3.6 mm)	
Day / Night	No	Yes
Minimum Illumination	Color: 0.5 lux at F1.0 (30 IRE, 2400°K) B/W: 0.5 lux at F1.0 (30 IRE, 2400°K)	Color: 0.5 lux at F1.0 (30 IRE, 2400°K) B/W: 0.05 lux at F1.0 (30 IRE, 2400°K)
Color to B/W switch	DSP based switch, configurable	
Mechanical IR Cut Filter	No	Yes
IR Sensitivity Range	No	700 - 1100 nm
IR LED	No	
Electronic Shutter	1/30 - 1/1,000 sec (60Hz); 1/25 - 1/1,000 sec (50Hz) (manual mode) 1/5 - 1/15,000 sec (auto mode)	
• Lens		
Focal Length	Fixed focal, f4.2 mm / F1.8	
Iris	Fixed iris	
Focus	Manual focus	
Mount Type	C/CS mount (interchangeable lens)	
Horizontal Viewing Angle	64.4°	
• Video		
Compression	MPEG-4 SP, MJPEG	
Maximum Frame Rate vs. Resolution	8 fps at 1280 x 1024 (SXGA); 10 fps at 1280 x 720 (HD 720p); 30 fps at 640 x 480 (VGA); 30 fps at 320 x 240 (QVGA); 30 fps at 160 x 112 (QQVGA)	
Multi-Streaming	Multiple streams based on single configuration	
Bit Rate	28 Kbps - 3 Mbps (per stream)	
Bit Rate Mode	Constant, Variable	
S/N Ratio	More than 44 dB	
Image Enhancement	White balance: automatic, predefined, manual; Brightness; Saturation; Contrast; Sharpness; Automatic gain control; Auto exposure: automatic, predefined, manual; Flickerless	
Privacy Mask	1 configurable region	
Text Overlay	User defined text on video	
Image Orientation	Image flip and mirror	
• Audio		
Compression	8 kHz, Mono, PCM, 16 bit encoding	
Audio-In	3.5 mm Phone Jack	
Audio-Out	3.5 mm Phone Jack	
• Network		
Protocol & Service	TCP, UDP, HTTP, HTTPS, DHCP, PPPoE, RTP, RTSP, DNS, DDNS, NTP, ICMP, ARP, IGMP, SMTP, FTP, UPnP, SNMP, Bonjour	
Ethernet Port	1, Ethernet (10/100Base-T), RJ-45 connector	
Security	IP address filtering; HTTPS encryption; Password protected user levels	
• Alarm		
Alarm Trigger	Video motion detection (3 regions); External device through digital input	
Alarm Response	Notify control center; Change camera settings; Command other devices; E-mail notification with snapshots; Upload video, snapshot to FTP server; Activate external device through digital output	
• Interface		
Digital Input	1, TTL, terminal block	
Digital Output	1, TTL, terminal block	
• General		
Power Source / Consumption	PoE Class 3 (IEEE802.3af) / 4.3 W DC 12V / 3.3 W	
Weight	400 g (0.88 lb)	
Dimensions (W x H x D)	67 mm x 55 mm x 129.5 mm (2.64" x 2.17" x 5.10")	
Operating Temperature	0 °C ~ 50 °C (32 °F ~ 122 °F)	
Approvals	CE, FCC	
• Integration		
Unified Solution	Fully compatible with ACTi software	
ISV Integration	Software Development Kit (SDK) available	
Firmware Access Browser	Microsoft Internet Explorer 6.0 or newer	

* All specifications are subject to change without notice.

* All brand names and registered trademarks are the property of their respective owners.

www.acti.com

