

N-Series Superior Night Vision

1.3 Megapixel Fixed Dome Network Camera

FD-130Np

Smart Focus® / WDR Enhancement®





- N-Series Sony Exmor 1.3M Indoor Dome Camera
- **Smart Focus®** to Ease the Zoom and Focus Adjustment Remotely
- Brickcom **WDR Enhancement®** technology inside
- HDTV Quality (720p @ 30fps)
- **Intelligent Multi-Profile Sensor Management®** for Different Environments
- Removable IR-cut Filter /Auto Light Sensor for Day and Night
- Two-way Audio/Built-in SD/SDHC Memory Card Slot for Local Storage
- 1 DI/DO for External Alarm and Sensor Device
- Power over Ethernet



Photo Indication & Dimension Diagram



- 1 RJ45 Connector (For Ethernet and PoE)
- 2 Conduit Plug and Hole
- 3 LENS
- 4 Tilt Screw
- 5 Reset Button
- 6 Terminal Block (For Audio in/out, DI/DO)
- 7 Terminal Block (for Power)
- 8 SD Card Slot

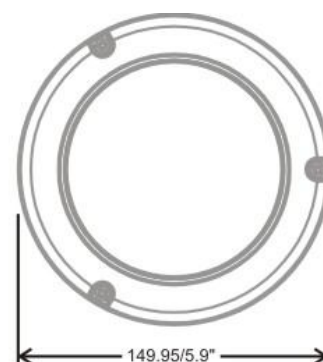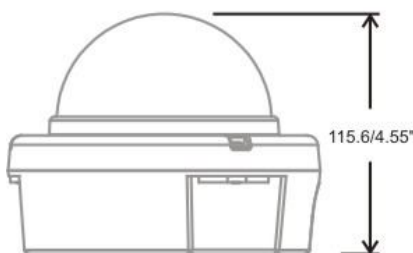

FD-130Np

Camera		Audio	
Hardware System	CPU: 500 MHz Flash: 16M RAM: 128M DDR	Audio Streaming	2-way Audio Support
Image Sensor	Sensor Type : 1/3" Sony CMOS 1.3 Megapixel Sensor Sensor Resolution : 1280x1024/HDTV Minimum illumination :0.1Lux@F1.2	Audio Compression	G.711, AMR (8 kHz, Mono, PCM)
Lens	Lens Type: Board Lens Focal Length: 3mm(W)~9mm(T) Iris: F1.2(W)~F2.7(T) View Angle: (H): 115.2°(W)~37.1°(T) (V): 63.29°(W)~20.8°(T) (D):132.6°(W)~42.5°(T)	Audio Input/ Output	Line In(Unbalanced, 1.4 Vp-p, 1 Vrms)/Line Out
Day & Night ICR	Triggered by Light sensor, Scheduling, Digital Input	General	
Video		Communication	Ethernet : one 10/100Mbps RJ-45 Supported Protocols : TCP/IP, UDP, ICMP, DHCP, NTP, DNS, DDNS, SMTP, FTP, HTTP, Samba, PPPoE, UPnP, RTP, RTSP, RTCP
Video Image Compression	H.264 / MPEG4 / MJPEG	Power Input	DC12V/ 802.3af Compliant Power on Ethernet (PoE)
Video Setting	Audio Exposure Control: Sport/ Normal/ Night Vision/ User Defined Auto Gain Control: 1X~5X Shuttle Speed: 1/32000 s ~ 1 s	Max. Power Consumption	6 watts
Image Resolution	1.3M -1280x1024@25fps 1M -1280x720@30fps	Environment	Operating Temperature 0°C ~ 50°C (32°F ~ 122°F), Operating Humidity : 10% ~ 80%
		Dimension	115.6(D) X 149.95 (H) mm
		Weight	509g/1.13lb
		Certification	FCC, CE
		Warranty	Limited 2-year warranty

Work Best With

Camera Accessories Options



IR-040
IR illuminator



L-WM-01
Camera Bracket



BP-1000
UPS power pack (Edge Recording)

Network Equipment Options



DWRT-600N
Dual Band Wireless Router



PS-588I
8-port 10/100M PoE Fast Ethernet Switch



PS-7242IL-AF
24-port 10/100M PoE Web Smart Ethernet Switch