

DS-PWA32-H(R)(S)(G) AX Series Wireless Security Control Panel

AX series wireless security control panel, containing 32 wireless zones, supports Wi-Fi, LAN, GPRS, and 3G/4G communication methods, as well as ISAPI, and SIA-Contact ID protocol. It is applicable to the scenarios of market, store, house, factory, warehouse, office, etc.



Available Model

DS-PWA32-H (Black/White)

DS-PWA32-HS (Black/White): supports 3G/4G DS-PWA32-HR (Black/White): supports IC Card

DS-PWA32-HSR (Black/White): supports 3G/4G and IC Card

DS-PWA32-HG (Black/White): supports GPRS

DS-PWA32-HGR (Black/White): supports GPRS and IC Card

Features


- Supports dual path communication of alarm events and other signals over LAN, Wi-Fi, GPRS and 3G/4G utilising a main and backup channel
- Supports up to 32 wireless inputs, 32 wireless outputs, 8 keyfobs and 2 sirens
- IVaas (Intruder Verification As A Service) :Support up to 2 channel 7 seconds pre/post alarm recording for Video Verification (Hikvision IP camera/3rd party IP camera support ONVIF)
- Supports viewing event video via mobile client and email
- Supports doorbell function: The detector rings like a doorbell when it is triggered in disarming status
- Voice prompt for configuration and operation
- Configuration via web client, mobile client, or client software
- Pushes alarm notification via messages, phone calls, and email
- SIA-Contact ID protocol compatible
- Long distance two-way communication (800m in open area)





- AES-128-bit data encryption
- Supports LED indicator to indicates system status
- 4520 mAh lithium backup battery, supports up to 12h power supply

Typical Application

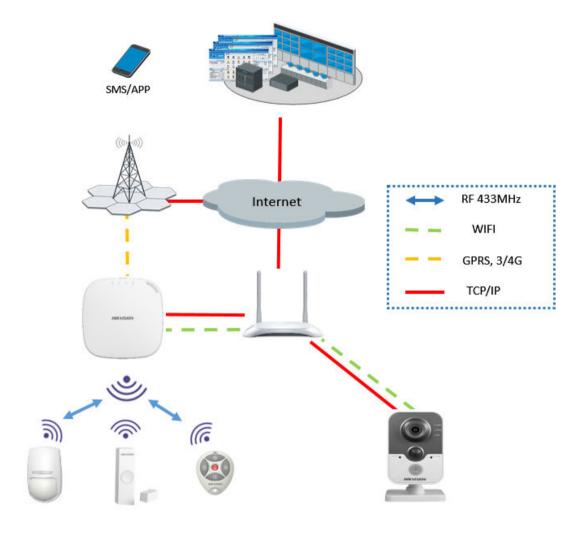



DS-PW32-H(R)(S)(G)		
Wireless Device Connection	Alarm Input	32
	Alarm Output	32
	Siren	2
	Keyfob	8
	Partition	1
Interaction	Audio Output	1, 1.5W
RF	RF Frequency	433MHz
	RF Modulation	2GFSK
	RF Distance	800m (Open Area)
Wired Network	Ethernet	10M/100M Self-adaptive
Cellular Network	GPRS, 3/4G	Supports reporting push-notification to ARC & Cloud, text notification via SMS, and audio notification via phone call
Wi-Fi	Standard	802.11b/g/n
	Encryption	Supported
	Channel	2.4 G
Application & Protocol	Application	iVMS-4200, and mobile APP
	Protocol	SIA - Contact ID
User	IC Card	12
	User	13 (1 installer, 1 administrator, and 11 general user)
Others	Power	5 VDC, 10 W
	Consumption (without HDD)	< 5.6 W
	Operation Temperature	–10 °C to 55 °C
	Operation Humidity	10% to 90%
	Shell Material	PC+ABS
	Dimension(WxHxD)	155 × 155 × 35mm



Distributed by

HIKVISION°

HeadquartersNo.555 Qianmo Road, Binjiang District, Hangzhou 310051, China T +86-571-8807-5998 overseasbusiness@hikvision.com

Hikvision USA

T+1-909-895-0400 sales.usa@hikvision.com

Hikvision Australia T+61-2-8599-4233 salesau@hikvision.com

Hikvision India T+91-22-28469900 sales@pramahikvision.com

Hikvision Canada T +1-866-200-6690 sales.canada@hikvision.com

Hikvision Thailand T +662-275-9949 sales.thailand@hikvision.com Hikvision Europe T +31-23-5542770 sales.eu@hikvision.com

Hikvision Italy T +39-0438-6902 info.it@hikvision.com

Hikvision Brazil T +55 11 3318-0050 Latam.support@hikvision.com

Hikvision Turkey T +90 (216)521 7070- 7074 sales.tr@hikvision.com

Hikvision Malaysia T+601-7652-2413 sales.my@hikvision.com Hikvision UK & Ireland T+01628-902140 sales.uk@hikvision.com

Hikvision South Africa Tel: +27 (10) 0351172 sale.africa@hikvision.com

Hikvision France T +33(0)1-85-330-450 info.fr@hikvision.com

Hikvision Kazakhstan T +7-727-9730667 nikia.panfilov@hikvision.ru

Hikvision Vietnam T +84-974270888 sales.vt@hikvision.com Hikvision UAE T +971-4-4432090 salesme@hikvision.com

Hikvision Singapore T +65-6684-4718 sg@hikvision.com

Hikvision Spain T +34-91-737-16-55 info.es@hikvision.com

Hikvision Tashkent T +99-87-1238-9438 uzb@hikvision.ru

Hikvision Hong Kong T +852-2151-1761 info.hk@hikvision.com **Hikvision Russia** T +7-495-669-67-99 saleru@hikvision.com

Hikvision Korea T +82-(0)31-731-8817 sales.korea@hikvision.com

Hikvision Poland T +48-22-460-01-50 info.pl@hikvision.com

Hikvision Indonesia T +62-21-2933759 Sales.Indonesia@hikvision.com

Hikvision Colombia sales.colombia@hikvision.com