



# FD8154V

## Fixed Dome Network Camera

1.3MP · SNV · Day & Night · 20M IR · IP66 · IK10 · 3DNR

VIVOTEK FD8154V is a compact fixed dome network camera with 1.3-Megapixel resolution and the ability to output 30 frames per second in H.264 compression. It includes multiple streams with different settings and applications, such as recording or live viewing, delivering excellent image quality during both daytime and nighttime.

Equipped with SNV (Supreme Night Visibility) technology, the FD8154V offers increased sensitivity to low light and provides clear images in dark conditions. In addition, built-in IR LEDs enables the camera to provide enough illumination for clear viewing up to 20 meters, even in completely dark environments.

Users can also benefit from simple installation with the compact housing and standard PoE power input design, as well as an SD card slot for local storage use.

Additionally, the FD8154V is an outdoor-ready camera with an IP66-rated weatherproof and IK10-rated vandal-proof housing for increased camera protection. With all of these features and more, the FD8154V is an ideal solution for megapixel surveillance needs.

### Key Features


- 1.3-Megapixel CMOS Sensor
- 30 fps @ 1280x1024
- Real-time H.264, MJPEG Compression (Dual Codec)
- Removable IR-cut Filter for Day & Night Function
- Built-in IR Illuminators, Effective up to 20 Meters
- Built-in 802.3af Compliant PoE
- Build-in MicroSD/SDHC/SDXC card slot for On-board Storage
- Supports ONVIF Standard to Simplify Integration and Enhance Interoperability
- Vandal-proof IK10-rated and Weather-proof IP66-rated Housing
- 3D Noise Reduction
- Supreme Night Visibility
- Selectable Lens




VIVOTEK SNV Camera - Show you true colors at night




Ordinary Camera




Airport



Parking Lot



Campus




Entrance

## Technical Specifications

<b>Model</b>	FD8154V-F2 FD8154V-F4	<b>Network</b>	
<b>System Information</b>		<b>Users</b>	Live viewing for up to 10 clients
<b>CPU</b>	Multimedia SoC (System-on-Chip)	<b>Protocols</b>	IPv4, IPv6, TCP/IP, HTTP, HTTPS, UPnP, RTSP/RTP/RTCP, IGMP, SMTP, FTP, DHCP, NTP, DNS, DDNS, PPPoE, CoS, QoS, SNMP, 802.1X, UDP, ICMP
<b>Flash</b>	128MB	<b>Interface</b>	10Base-T/100 BaseTX Ethernet (RJ-45)
<b>RAM</b>	128MB	<b>ONVIF</b>	Supported, specification available at <a href="http://www.onvif.org">www.onvif.org</a>
<b>Camera Features</b>		<b>Intelligent Video</b>	
<b>Image Sensor</b>	1/3" Progressive CMOS	<b>Video Motion Detection</b>	Triple-window video motion detection
<b>Maximum Resolution</b>	1280x1024	<b>Alarm and Event</b>	
<b>Lens Type</b>	Fixed-focal	<b>Alarm Triggers</b>	Video motion detection, manual trigger, digital input, periodical trigger, system boot, recording notification, camera tampering detection
<b>Focal Length</b>	f = 2.8 mm (FD8154V-F2) f = 4 mm (FD8154V-F4)	<b>Alarm Events</b>	Event notification using digital output, HTTP, SMTP, FTP and NAS server File upload via HTTP, SMTP, FTP and NAS server
<b>Aperture</b>	F2.0 (FD8154V-F2) F1.6 (FD8154V-F4)	<b>General</b>	
<b>Field of View</b>	FD8154V-F2: 101° (horizontal) 80° (vertical) 130° (diagonal) FD8154V-F4: 69° (horizontal) 54° (vertical) 87° (diagonal)	<b>Connectors</b>	RJ-45 for Network/PoE connection Digital input*1
<b>Shutter Time</b>	1/5 sec. to 1/32,000 sec.	<b>LED Indicator</b>	System power and status indicator
<b>Day/Night</b>	Removable IR-cut filter for day & night function	<b>Power Input</b>	IEEE 802.3af PoE Class 2
<b>Minimum Illumination</b>	0.08 Lux @ F1.6, 30 IRE (Color) 0.06 Lux @ F1.6, 30 IRE (B/W) 0 Lux @ IR LED ON	<b>Power Consumption</b>	Max. 5.1W
<b>Pan/tilt/zoom</b>	ePTZ:	<b>Dimensions</b>	Ø: 152 mm x 94 mm
<b>Functionalities</b>	48x digital zoom (4x on IE plug-in, 12x built-in)	<b>Weight</b>	Net: 659g
<b>IR Illuminators</b>	Built-in IR illuminators, effective up to 20 meters IR LED*8	<b>Casing</b>	Vandal-proof IK10-rated metal housing Weather-proof IP66-rated housing
<b>On-board Storage</b>	MicroSD/SDHC/SDXC card slot	<b>Safety Certifications</b>	CE, LVD, FCC Class A, VCCI, C-Tick
<b>Video</b>		<b>Operating Temperature</b>	Starting Temperature: -10°C ~ 50°C (14°F ~ 122°F) Working Temperature: -20°C ~ 50°C (-4°F ~ 122°F)
<b>Compression</b>	H.264 & MJPEG	<b>Warranty</b>	24 months
<b>Maximum Frame Rate</b>	30 fps @ 1280x1024 In both compression	<b>System Requirements</b>	
<b>Maximum Streams</b>	3 simultaneous streams	<b>Operating System</b>	Microsoft Windows 7/Vista/XP/2000
<b>S/N Ratio</b>	Above 56 dB	<b>Web Browser</b>	Mozilla Firefox 7~10 (streaming only) Internet Explorer 7.x, 8.x, 9.x, 10.x
<b>Video Streaming</b>	Adjustable resolution, quality and bitrate Configurable video cropping for bandwidth saving	<b>Other Players</b>	VLC: 1.1.11 or above QuickTime: 7 or above
<b>Image Settings</b>	Adjustable image size, quality and bit rate Time stamp, text overlay, flip & mirror Configurable brightness, contrast, saturation, sharpness, white balance, exposure control, gain, backlight compensation, privacy masks Scheduled profile settings, 3D noise reduction	<b>Included Accessories</b>	
<b>Audio</b>		<b>CD</b>	User's manual, quick installation guide, Installation Wizard 2, ST7501 32-channel recording software
<b>Audio Capability</b>	Audio input	<b>Others</b>	Quick installation guide, warranty card, alignment sticker, screw pack, software CD
<b>Compression</b>	G.711		
<b>Interface</b>	Built-in microphone		
<b>Effective Range</b>	5 meters		

## Dimensions

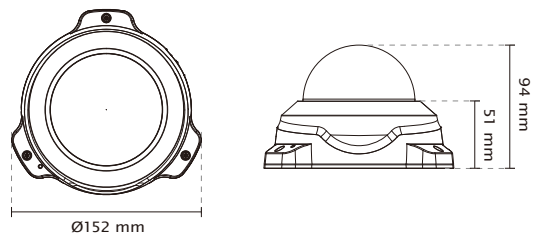

## Compatible Accessories

### Mounting Kits



**AM-211**  
L-shape wall mount

### PoE Kits



**POE-IJ-1748NDN**  
802.3af Compliant PoE Injector

All specifications are subject to change without notice. Copyright © VIVOTEK INC. All rights reserved.

Distributed by:



**VIVOTEK INC.**  
6F, No.192, Lien-Cheng Rd., Chung-Ho,  
New Taipei City, 235, Taiwan, R.O.C.  
T: +886-2-82455282 F: +886-2-82455532  
E: [sales@vivotek.com](mailto:sales@vivotek.com)

**VIVOTEK USA**  
2050 Ringwood Avenue,  
San Jose, CA 95131  
T: 408-773-8686 F: 408-773-8298  
E: [salesusa@vivotek.com](mailto:salesusa@vivotek.com)

**VIVOTEK Europe**  
Randstad 22-133, 1316BW Almere,  
The Netherlands  
T: +31(0)36-5298-434  
E: [sales europe@vivotek.com](mailto:sales europe@vivotek.com)

Ver 1.0