

IB8367/67-R

Bullet Network Camera



2MP · 30M IR · Smart IR · IP66 · Cable Management ·
Smart Stream · PoE Extender · Low Light


VIVOTEK IB8367/IB8367-R is a stylish, bullet-style network camera designed for diverse outdoor applications. Equipped with a 2MP sensor enabling viewing resolution of 1920x1080 at a smooth 30 fps, the IB8367/IB8367-R is an all-in-one outdoor camera capable of capturing high quality and high resolution video up to 2 Megapixel, even in low light environment. IB8367/IB8367-R is also designed with VIVOTEK Smart Stream, 3DNR to save notable bandwidth for users.

To meet more outdoor applications and ease cable deployment, IB8367-R is the first network camera designed with embedded extender to allow PoE input and PoE output. Users can implement a total PoE solution perfectly. Incorporating a number of advanced features standard for VIVOTEK cameras, the IB8367/IB8367-R are the ideal solutions for your outdoor surveillance needs.


Key Features

- 2-Megapixel CMOS Sensor
- 30 fps @ 1920x1080
- 2.8 ~ 12 mm Vari-focal, P-iris Lens
- Removable IR-cut Filter for Day & Night Function
- Built-in IR Illuminators, Effective up to 30 Meters
- Real-time H.264, and MJPEG Compression
- Two-way Audio
- WDR Enhancement for Unparalleled Visibility in Extremely Bright and Dark Environments
- Weather-proof IP66-rated Housing
- 3D Noise Reduction
- Smart IR Technology to Avoid Overexposure
- Embedded PoE Extender Design to Support both PoE Input & Output (IB8367-R)


Embedded PoE Extender

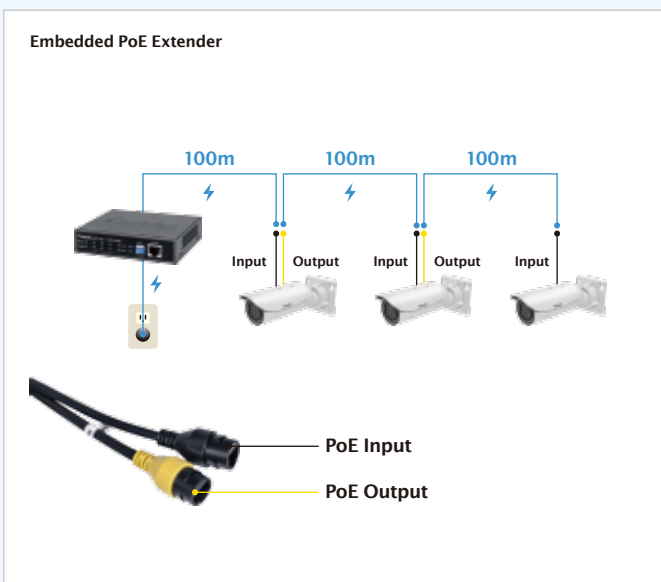


Embedded PoE Extender



Parking Lot



Outdoor Sidewalk



Factory



Technical Specifications

Models	IB8367 IB8367-R	Alarm and Event	
System Information		Alarm Triggers	Video motion detection, manual trigger, digital input, periodical trigger, system boot, recording notification, camera tampering detection ,audio detection
CPU	Multimedia SoC (System-on-Chip)	Alarm Events	Event notification using digital output, HTTP, SMTP, FTP and NAS server, SD Card File upload via HTTP, SMTP, FTP, NAS server and SD card
Flash	128MB	General	
RAM	256MB	Smart Focus System	Manual focus
Camera Features		Connectors	RJ-45 cable connector for Network/PoE connection RJ-45 cable connector for PoE output (IB8367-R) Audio input Audio output DC 12V power input (IB8367) Digital input*1 Digital output*1
Image Sensor	1/2.8" Progressive CMOS	LED Indicator	System power and status indicator
Maximum Resolution	1920x1080 (2MP)	Power Input	IB8367 DC 12V IEEE 802.3af PoE Class 3 IB8367-R IEEE 802.3at, UPoE
Lens Type	Vari-focal	Power Consumption	IB8367 Max:8.6 W (DC12V) Max:9.7 W (PoE) IB8367-R Max:10W (PoE)
Focal Length	f = 2.8 ~ 12 mm	Dimensions	Ø: 82 x 283 mm
Aperture	F1.8 ~ F2.85	Weight	Net: 920 g Net: 985 g (IB8367-R)
Auto-iris	P-Iris	Casing	Weather-proof IP66-rated housing
Field of View	30° ~ 98° (Horizontal) 21° ~ 54° (Vertical) 40° ~ 121° (Diagonal)	Safety Certifications	CE, LVD, FCC Class A, VCCI, C-Tick, UL
Shutter Time	1/5 sec. to 1/32,000 sec.	Operating Temperature	Starting Temperature: -10°C ~ 50°C (14°F~ 122°F) Working Temperature: -20°C ~ 50°C (-4°F~ 122°F)
WDR Technology	WDR Enhanced	Warranty	36 months
Day/Night	Removable IR-cut filter for day & night function	System Requirements	
Minimum Illumination	0.06 Lux @ F1.8 (Color) 0.001 Lux @ F1.8 (B/W)	Operating System	Microsoft Windows 7/8/Vista/XP/2000
Pan/tilt/zoom Functionalities	ePTZ: 48x digital zoom (4x on IE plug-in, 12x built in)	Web Browser	Mozilla Firefox 7~10 (Streaming only) Internet Explorer 7.x, 8.x, 9.x,10.x
IR Illuminators	Built-in IR illuminators, effective up to 30 meters with Smart IR IR LED*6	Other Players	VLC: 1.1.11 or above Quicktime: 7 or above
On-board Storage	SD/SDHC/SDXC card slot	Included Accessories	
Video		CD	User's manual, quick installation guide, Installation Wizard 2, ST7501 32-channel recording software
Compression	H.264 & MJPEG	Others	Quick installation guide, warranty card, sun shield, wall mount bracket, alignment sticker/desiccant bag, waterproof connector, screw pack
Maximum Frame Rate	30 fps @ 1920x1080 In both compression modes	Dimensions	
Maximum Streams	3 simultaneous streams		
S/N Ratio	Above 58 dB		
Dynamic Range	60 dB		
Video Streaming	Adjustable resolution, quality and bitrate		
Image Settings	Adjustable image size, quality and bit rate, Time stamp, text overlay, flip & mirror, Configurable brightness, contrast, saturation, sharpness, white balance, exposure control, gain, backlight compensation, privacy masks,Scheduled profile settings, Seamless recording, smart stream, 3D Noise Reduction		
Audio			
Audio Capability	Audio input /output (full duplex)		
Compression	G.711, G.726		
Interface	External microphone input External line output		
Network			
Users	Live viewing for up to 10 clients		
Protocols	IPv4, IPv6, TCP/IP, HTTP, HTTPS, UPnP, RTSP/RTP/RTCP, IGMP, SMTP, FTP, DHCP, NTP, DNS, DDNS, PPPoE, CoS, QoS, SNMP, 802.1X, UDP, ICMP		
Interface	10Base-T/100 BaseTX Ethernet (RJ-45)		
ONVIF	Supported, specification available at www.onvif.org		
Intelligent Video			
Video Motion Detection	Triple-window video motion detection		

Compatible Accessories

Mounting Kits



AM-311
Pole Mount Adaptor



AM-411
Corner Mount Adaptor

All specifications are subject to change without notice. Copyright © VIVOTEK INC. All rights reserved.

Distributed by:



VIVOTEK INC.
6F, No.192, Lien-Cheng Rd., Chung-Ho,
New Taipei City, 235, Taiwan, R.O.C.
T: +886-2-82455282 F: +886-2-82455532
E: sales@vivotek.com

VIVOTEK USA
2050 Ringwood Avenue,
San Jose, CA 95131
T: 408-773-8686 F: 408-773-8298
E: salesusa@vivotek.com

VIVOTEK Europe
Randstad 22-133, 1316BW Almere,
The Netherlands
T: +31(0)36-5298-434
E: saleseurope@vivotek.com

Ver 1.7